



**State Road (SR) 5/US 1 Resurfacing Project  
from north of SR 70/Virginia Avenue to Sunny Lane**

in the City of Fort Pierce, St. Lucie County

Financial Project ID: 446109-1-52-01

Virtual Public Meeting  
Wednesday, November 8, 2023

# Virtual Public Meeting Orientation

## Moderator & Presenter



**Samantha Kayser**  
Community Outreach Specialist  
The Corradino Group

## Meeting Format

### Presentation, Q&A Session

- 5 p.m. to 5:30 p.m.
- 5:30 p.m. to 6 p.m.

The Florida Department of Transportation is required to comply with various non-discrimination laws and regulations, including

**Title VI of the Civil Rights Act of 1964.**

*Public participation is solicited without regard to race, color, national origin, age, sex, religion, disability, or family status.*

**Persons wishing to express concerns about Title VI may do so by contacting either:**

**District Four**

Florida Department of Transportation  
*District Four Title VI Coordinator*

**Sharon Singh Hagyan**

(954) 777-4190

[Sharon.SinghHagyan@dot.state.fl.us](mailto:Sharon.SinghHagyan@dot.state.fl.us)



**Tallahassee Office**

Florida Department of Transportation  
*State Title VI Coordinator*

**Stefan Kulakowski**

(850) 414-4742

[Stefan.Kulakowski@dot.state.fl.us](mailto:Stefan.Kulakowski@dot.state.fl.us)



*All inquiries or concerns will be handled according to FDOT procedure and in a prompt and courteous manner.*


# Virtual Public Meeting Orientation



- This Virtual Public Meeting is being recorded.
- All attendees **will remain muted** throughout the meeting.
- If you experience technical difficulties, please contact **GoToWebinar Support at +1(833) 851-8340**.
- At the end of the presentation attendees are also welcome to submit any questions/comments using the GoToWebinar Question Panel and a member of the team will respond during the question-and-answer portion. To request to speak, click the Raise Hand button on the Control Panel and unmute your microphone when your name is called.

# Participating on GoToWebinar

- If you would like to ask a question verbally, please click on the hand icon to be recognized.
- This meeting is being recorded and will be posted to [www.d4fdot.com](http://www.d4fdot.com).

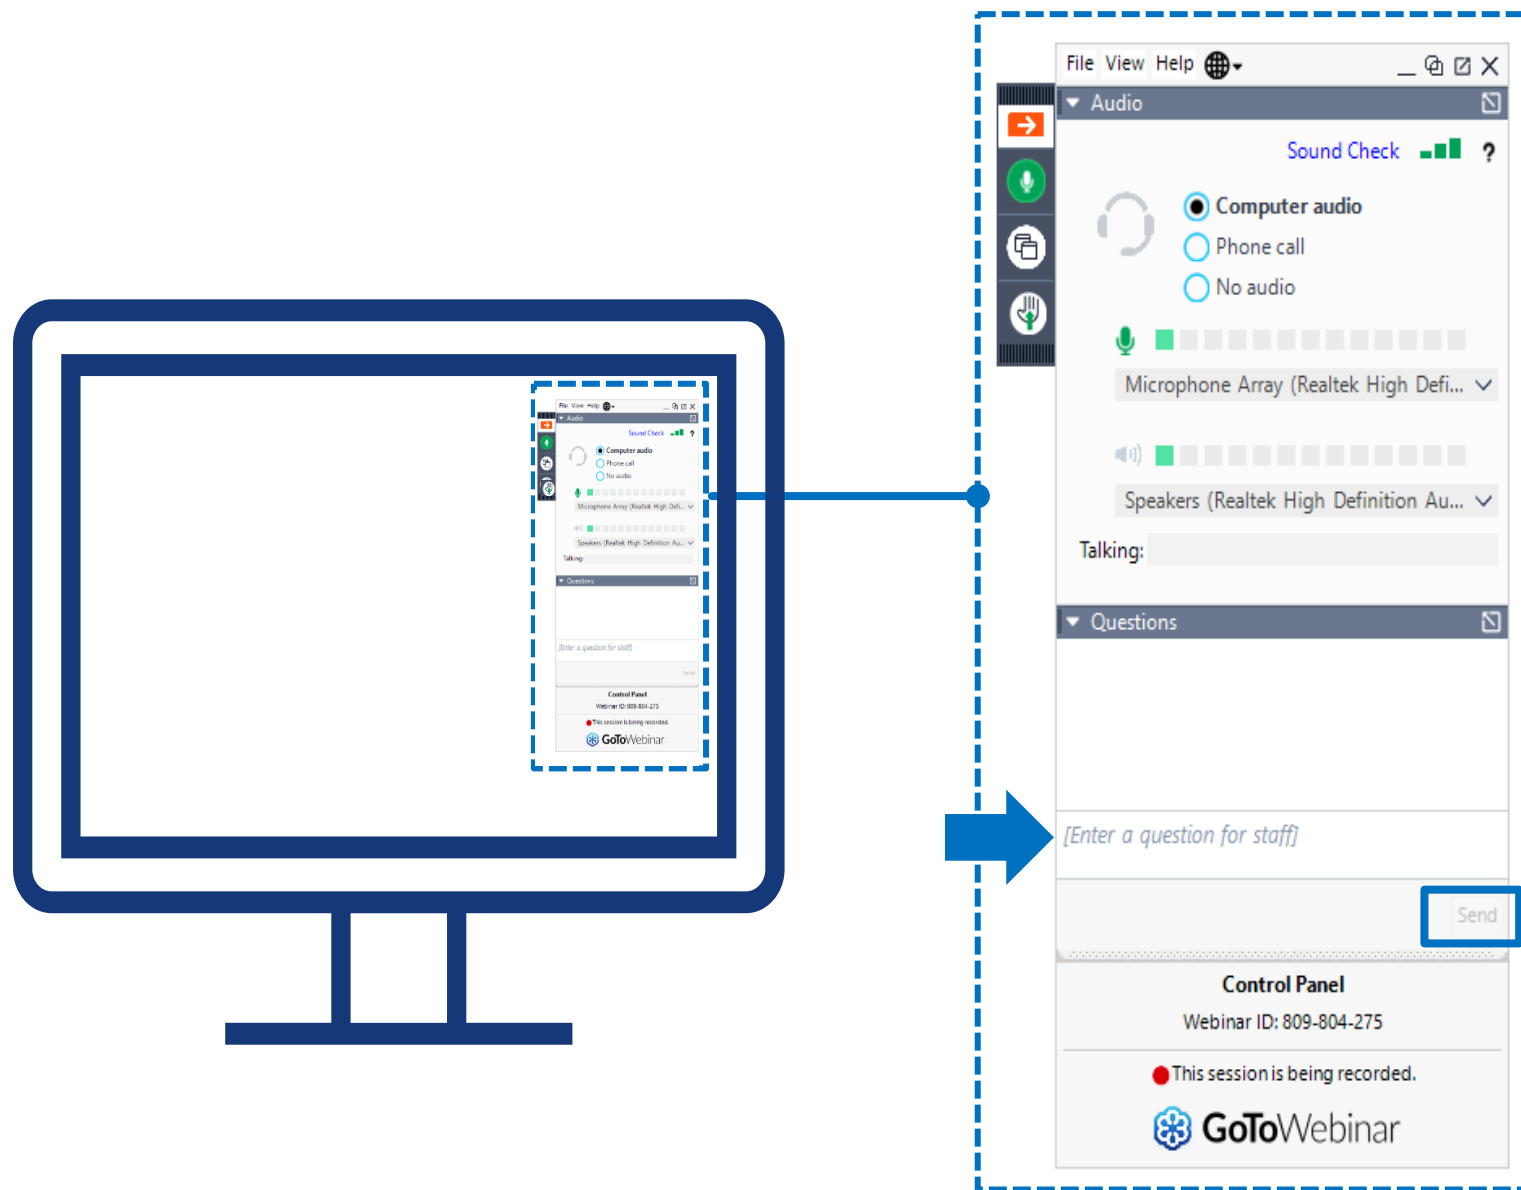

# Meet the Team



**Mark Freeman**

Construction Project Manager  
FDOT District Four, Treasure Coast  
Operations



**Ronald Wallace, P.E.**

Design Project Manager  
FDOT District Four



**Etienne Bourgeois, P.E.**

Senior Project Engineer and Construction  
Project Administrator  
Gannett Fleming



**Manuel Richardson, P.E.**


Engineer of Record  
Volkert, Inc.



**Nabilah Miah**

Contractor  
C.W. Roberts Contracting, Inc.

# Project Presentation

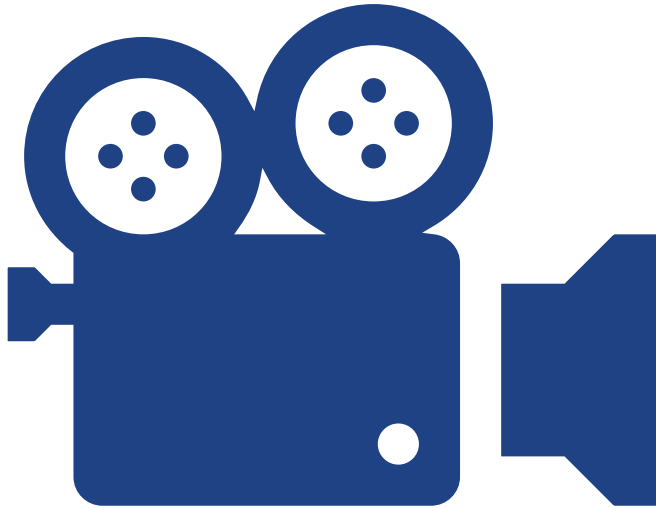

- Please enjoy the following slides, which include information on the improvements to be completed and road and lane closure information.
- We will start the Question & Answer session after we have reviewed the project.

# Project Limits





# Project Overview

**Purpose:** Resurface existing travel lanes, upgrade sidewalks and curb ramps, upgrade signage, install new pavement markings, upgrade pedestrian signals and pushbutton detectors at signalized intersections, upgrade pedestrian level lighting at signalized intersections, and minor drainage improvements.

**Length:** 3 Miles

**Contractor:** C.W. Roberts Contracting, Inc.

**Construction Start:** November 20, 2023

**Estimated Contract Cost:** \$6.1 Million

**Estimated Completion:** Fall 2024



SR 5/US 1 at Ohio Avenue looking south  
Pre-Construction

## Roadway and Drainage Improvements

- Milling and resurfacing the existing travel lanes with the exception of the Taylor Creek Bridge
- Installing new pavement markings
- Constructing minor drainage improvements at intersections of SR 5/US 1 and Tennessee Avenue and SR 5/US 1 at SR 68/Orange Avenue




SR 5/US 1 at Tennessee Avenue  
Pre-Construction

## Pedestrian Improvements




- Upgrading sidewalks and curb ramps to comply with the Americans with Disabilities Act (ADA) criteria.
- Upgrading signage to comply with current design standards.
- Upgrading pedestrian signals and pushbutton detectors at signalized intersections.
- Upgrading pedestrian level lighting at signalized intersections.

# Typical Section
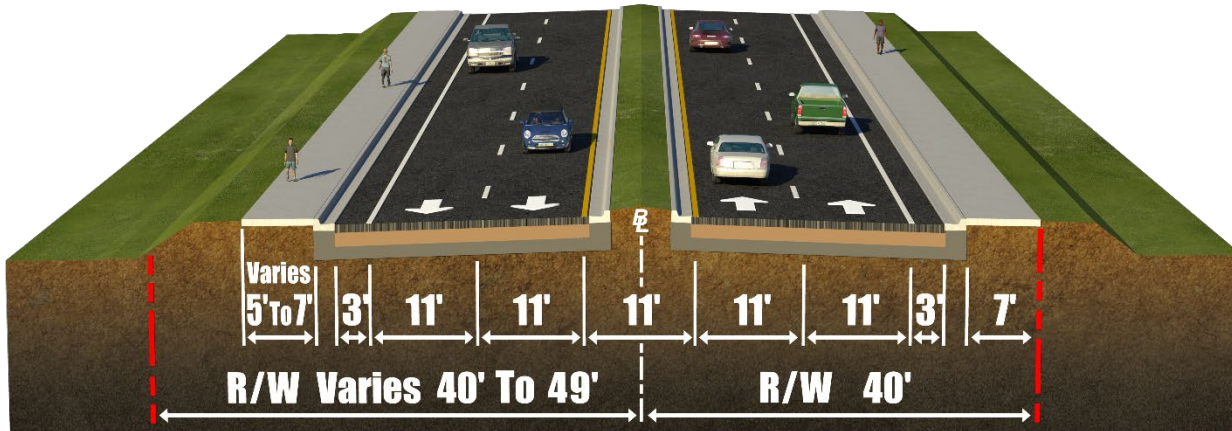
## SR 5/US 1 from Tennessee Avenue to Georgia Avenue



### LEGEND


-  Sidewalk
-  Resurfaced Roadway
-  Median and Grass/Sod

*The existing roadway configuration will remain, and the roadway will be milled and resurfaced.*



# Typical Section

## SR 5/US 1 from Georgia Avenue to Seaway Drive

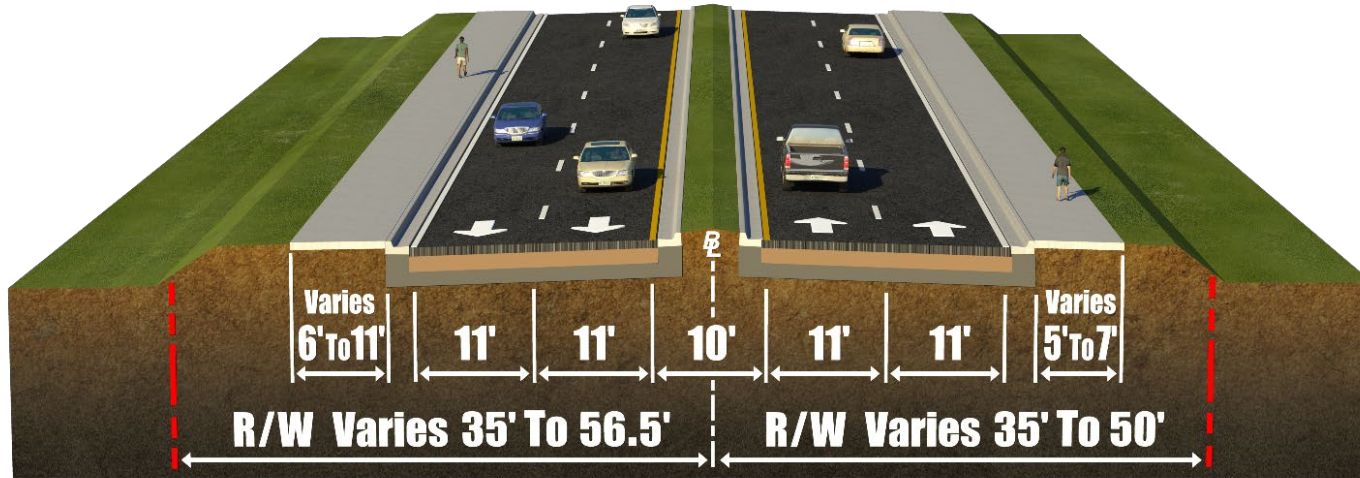

### LEGEND


- |  |          |  |           |
|--|----------|--|-----------|
|  | Sidewalk |  | Roadway   |
|  | Median   |  | Sod/Grass |

*The existing roadway configuration will remain, and the roadway will be milled and resurfaced.*



# Typical Section

## SR 5/US 1 from Seaway Drive to Beginning of Taylor Creek Bridge

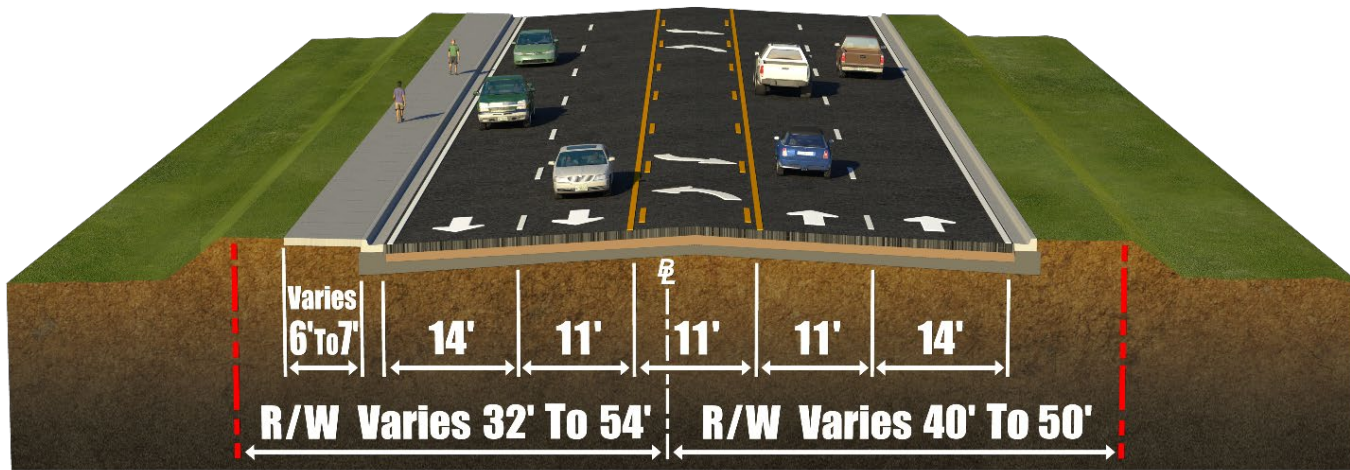


| LEGEND |           |
|--------|-----------|
|        | Sod/Grass |
|        | Roadway   |
|        | Sidewalk  |

*The existing roadway configuration will remain, and the roadway will be milled and resurfaced.*



# Typical Section

## SR 5/US 1 from the End of Taylor Creek Bridge to Sunny Lane

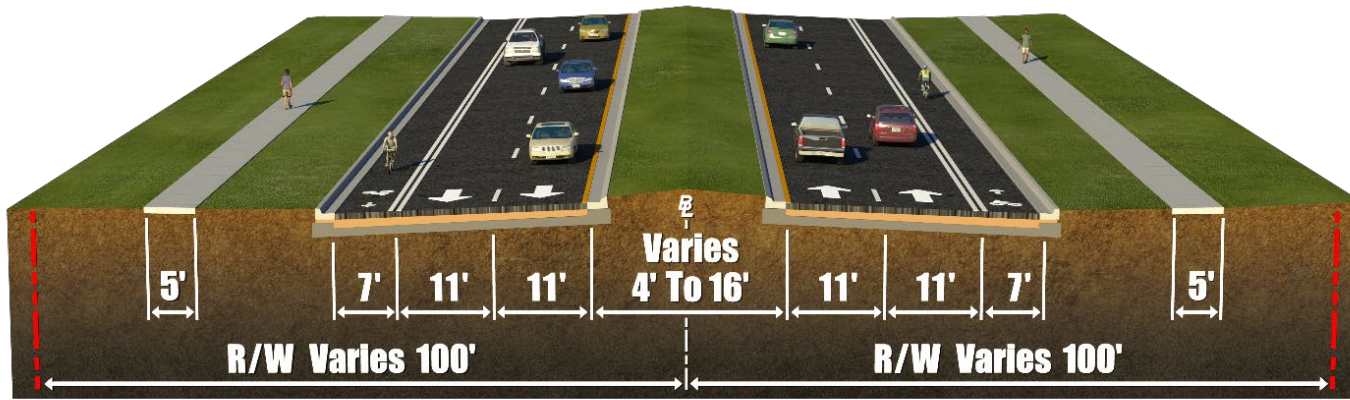

### LEGEND



Sod/Grass



Roadway



Sidewalk

*The existing roadway configuration will remain, and the roadway will be milled and resurfaced.*



## Maintenance of Traffic

- Work will be performed in phases to reduce impact of construction within the community.
- Single-lane closures on SR 5/US 1 are permitted nightly, Sunday through Thursday from 8:30 p.m. to 6:00 a.m.
- Access to businesses will be maintained at all times.



Pedestrian signal at the SR 5/US 1 and  
Ohio Avenue Intersection  
Pre-Construction



# Construction Phases

## Phase 1: Northbound SR 5/US 1


- Construct sidewalk
- Install pedestrian railing
- Construct curb and gutter, and curb ramps
- Install signalization and lighting at intersections



SR 5/US 1 looking north  
Pre-Construction

## Phase 2: Southbound SR 5/US 1

- Construct sidewalk
- Install pedestrian railing
- Construct curb and gutter, and curb ramps
- Install signalization and lighting at intersections

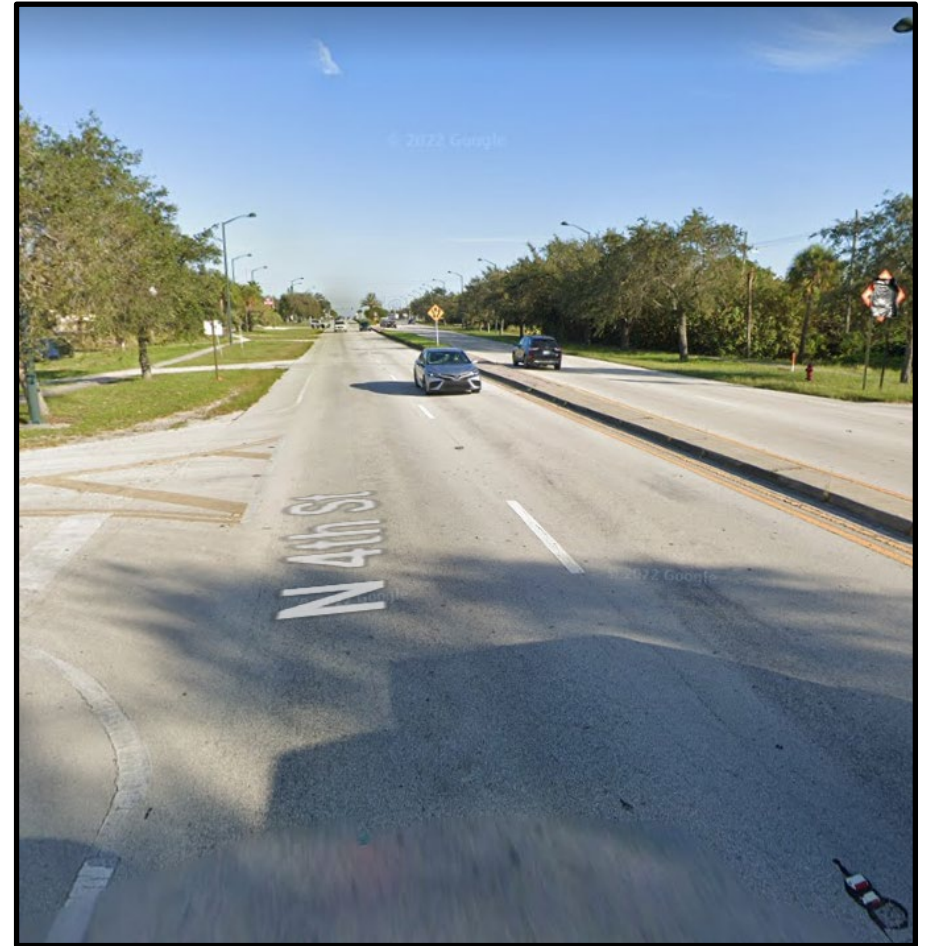

Northbound SR 5/US 1 just north of the Taylor  
Creek Bridge  
Pre-Construction

## Phases 3

- Mill and resurface the existing roadway and install final friction course in both directions of SR 5/US 1
- Install final pavement markings and signage



SR 5/US 1 at SR 68/Orange Avenue  
Pre-Construction

# Safety and Local Coordination

- **Public Safety is our Top Priority!**
  - **Work Zone Signage & Maintenance of Traffic**
    - Advanced warning and project signage will be placed throughout the construction corridor to alert the traveling public
  - **Local Agency & Stakeholder Coordination**
    - The project team will continue working closely with local stakeholders including local municipalities, schools, neighborhoods and other local agencies to ensure safety standards are met and impacts to the public are minimized in any way possible
  - **Emergency vehicles will be provided access at all times**



Lighted Message Board

# Community Outreach

- To receive project specific updates please email [skayser@corradino.com](mailto:skayser@corradino.com) to be added to the distribution list
- A weekly press release will be distributed every Friday
- Additional project specific information can be found on the website

**\*\*All project updates will be posted to the District Four website.\*\***




***Scan this QR code to go to the District Four Website.***

*www.d4fdot.com*

# Questions and Answers

- Attendees are welcome to submit questions/comments using the GoToWebinar Question Panel

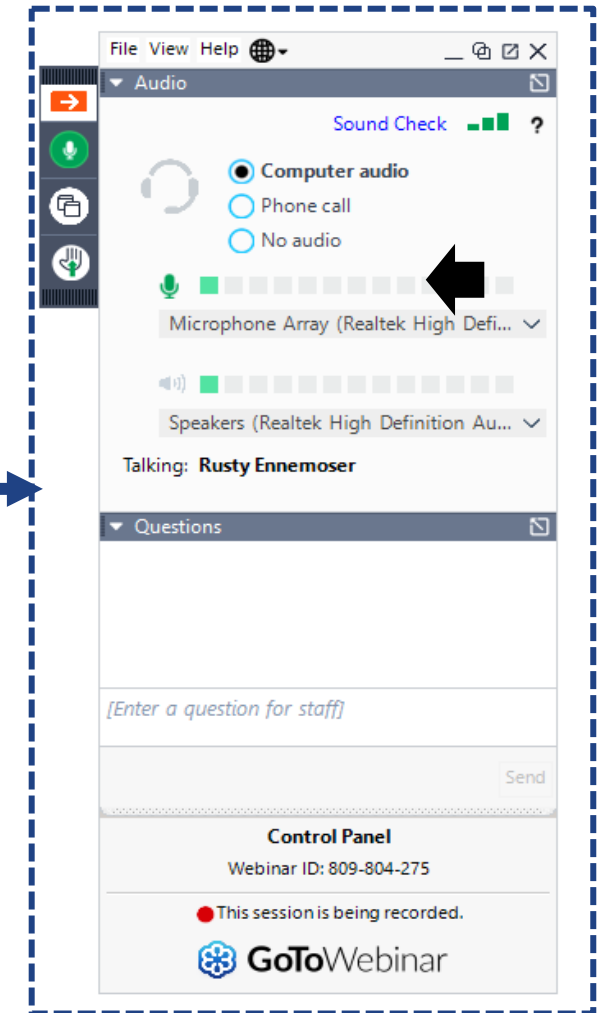

# Contact Us

Throughout the project, questions or comments can be submitted via email or phone.

**Samantha Kayser**  
**Community Outreach Specialist**



[skayser@corradino.com](mailto:skayser@corradino.com)



(772) 579-5479

**Etienne Bourgeois, P.E.**  
**Construction Project Administrator**



[ebourgeois@gfnet.com](mailto:ebourgeois@gfnet.com)



(561) 252-7473

**Mark Freeman**  
**Construction Project Manager**



[mark.freeman@dot.state.fl.us](mailto:mark.freeman@dot.state.fl.us)



(772) 429-4904

*This PowerPoint presentation has been  
 uploaded to GoToWebinar for  
 download.*

# FDOT Safety Message







**Thank you for attending today's  
Virtual Public Meeting!**